


# Exit Box Gen 2

## Wall Mounted Exit Sign

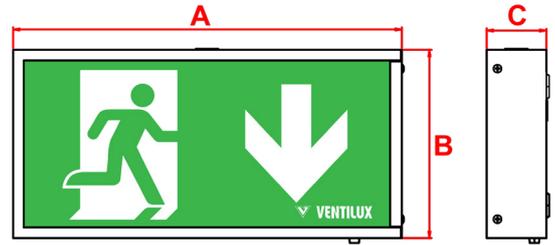

<b>33M</b> Viewing Distance	<b>IP 20</b>	LiFePO4 Battery	Wall Mounting
1.5Kg	5500K	Class I	<b>3Y</b> Warranty

### Materials

Housing: Folded Sheet Steel  
Panel Legend: Polycarbonate

Standard Colour: White - RAL 9016

### Warranty

Standard Warranty: 3 Years  
Alternative Warranty: 6 Years  
Add **16Y** Years to Order Code

Order Code	<b>EB2M3/LED/**</b>
Mode of operation	Maintained
Emergency duration	3 hours
Input voltage	230/240V (207VAC - 264VAC) 50/60Hz
Power consumption	10VA, I <sub>nom</sub> = 42mA (Full Battery)
Battery type	Rechargeable LiFePO4 3.2V 1.5Ah
Battery low voltage cut off	2.6V DC
Battery discharge current @ 3.2V DC	0.24A
Lamp	2W LED Strip
Lamp colour	5500K
Viewing Distance	33m
Lamp Lifetime	L <sub>80</sub> B <sub>50</sub>
Nominal lamp voltage	V <sub>rated</sub> = 5.8V DC
Nominal lamp current @ 3.2V	I <sub>rated</sub> = 120mA CC
Nominal lamp power @ 3.2V	P <sub>rated</sub> = 0.6W
Maximum output voltage with no lamp connected	U-OUT = 8V DC
Ingress protection	IP20
Cable entry	20mm on top and rear of product
Luminaire class	Class I
Weight	1.5 Kg
Standards	EN61347-2-7, EN61347-2-13, EN 60598-2-22, EN 55015
Environment	0°C to 45°C up to 80% relative humidity

System	Order Code	Mode of Operation	Battery	Battery P/N	Viewing Distance	Dimensions (mm)		
						A	B	C
Standalone	EB2M3/LED/**	Maintained	3.2V, 1.5Ah LiFePO4	70165	33m	390	190	60

### \*\*Alternative Legends



Replace \*\* with 01 to include  
Left Arrow  
PN: 01028



Replace \*\* with 02 to include  
Down Arrow  
PN: 01029



Replace \*\* with 03 fo include  
Right Arrow  
PN: 01030



Replace \*\* with 04 to include  
Up Arrow  
PN: 01034