


# I-Lux Spotlight DALI

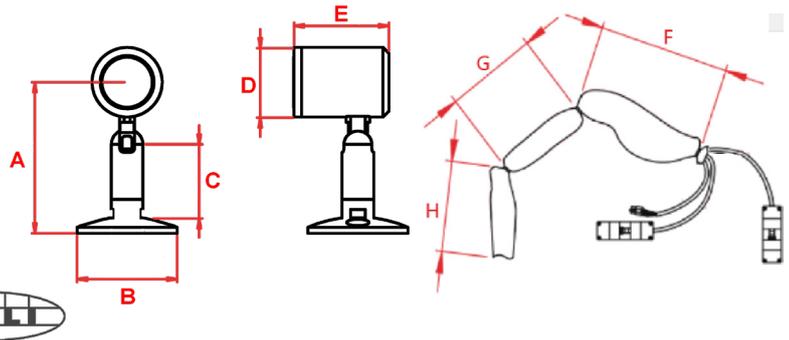

<b>180</b> Lumens	<b>3</b> Watts	<b>6000K</b>	Universal Mounting
Ni-Cd Battery	Class I	<b>IP</b> <b>40</b>	<b>6Y</b> Warranty

## Materials

Housing: Die-Cast Aluminium  
Remote Pack: Silicone Sock

Standard Colour: Chrome  
Alternative Colours: \*\*White - RAL 9016  
Add **WH** to Order Code

Alternative Colours Available Upon Request

## Warranty

Standard Warranty: 6 Years  
Alternative Warranty: 10 Years  
Add /10 Years to Order Code

Order Code	ZILUNM3LED**DA
Mode of operation	Non-maintained Dali
Emergency duration	3 hours
Input voltage	230/240V (207Vac - 264Vac) 50/60Hz
Power consumption	7VA, Inom = 35mA
Battery type	Rechargeable Ni-Cd Battery 6V 4.5Ah
Battery charger	Nominal/boost charge current 140/260mA
Battery charging limits	max = up to 1.2A for 3 hours
Battery low voltage cut off	5V
Battery discharge current	0.85A
Battery discharging limits	max = up to 1.2A for 3 hours
Lamp	3W
Lamp colour	6000K
Lamp lumen level in emergency	180lm
Nominal lamp current	Irated 1Acc
Nominal lamp power	Prated = 4W
Maximum output voltage with no lamp connected	U-OUT = 10Vdc
Ingress protection	IP40
Luminaire class	Class I
Weight	0.9Kg
Packaging Weight	0.1kg
Standards	EN61347-2-7, EN61347-2-13, EN 60598-2-22
Environment	0°C to 45°C up to 80% relative humidity

System	Order Code	Mode of Operation	Battery	Battery P/N	Lumens (Emergency)	Dimensions (mm)							
						Spot					Control gear		
						A	B	C	D	E	F	G	H
<b>DALI</b>	<b>ZILUNM3LED**DA</b>	<b>Non-Maintained</b>	<b>6V, 4.5Ah Ni-Cd</b>	<b>70157</b>	<b>180</b>	<b>51</b>	<b>34</b>	<b>25</b>	<b>24</b>	<b>31</b>	<b>230</b>	<b>180</b>	<b>130</b>
Alternative Systems Available: Specification Sheets Available Upon Request													
Standalone	ZILUNM3LED3W**	Non-Maintained	4.8V, 4.5Ah Ni-Cd	70244	180	51	34	25	24	31	190	130	130
Central Battery	ZILULED3W**230S	Slave	-	-	180	51	34	25	24	31	210	N/A	N/A
DALI Central Battery	ZILULED3W**230SDA	Slave	-	-	180	51	34	25	24	31	190	N/A	N/A