
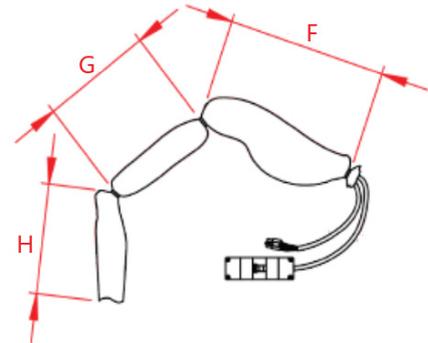


I-Lux

Spotlight- Recessed Pack

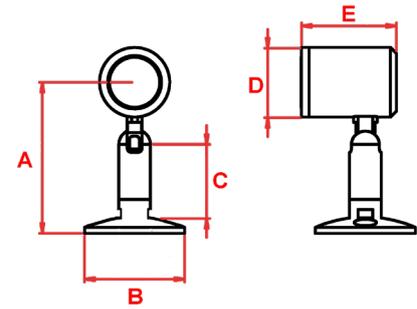

180 Lumens	3 Watts	6000K	Wall and Ceiling Mounting
Ni-Cd Battery	Class I	IP 40	6Y Warranty

Order Code	ZILUNM3LED3W*
Mode of operation	Non-maintained
Emergency duration	3 hours
Input voltage	230/240V (207Vac - 264Vac) 50/60Hz
Power consumption	3.5VA, I _{nom} = 15mA
Battery type	Rechargeable Ni-Cd 4.8V 4.5Ah
Battery low voltage cut off	4.0Vdc
Battery discharge current @ 4.8VDC	0.59A
Lamp	3W
Lamp colour	6000K
Lamp lumen level in emergency	180lm
Nominal lamp current	I _{rated} = 0.65A
Nominal lamp power	P _{rated} = 3W
Maximum output voltage with no lamp connected	U-OUT = 7.0Vdc
Ingress protection	IP40
Luminaire class	Class I
Weight	0.9Kg
Packaging Weight	0.1kg
Standards	EN61347-2-7, EN61347-2-13, EN 60598-2-22

Materials

Housing:	Die-Cast Aluminium
Remote Pack:	Silicone Sock
Standard Colour:	Chrome
Alternative Colours:	*White - RAL 9016 Add MWH to Order Code
Alternative Colours Available Upon Request	

Warranty

Standard Warranty:	6 Years
Alternative Warranty:	10 Years Add /10 Years to Order Code

System	Order Code	Mode of Operation	Battery	Battery P/N	Lumens (Emergency)	Dimensions (mm)							
						Spot					Control gear		
						A	B	C	D	E	F	G	H
Standalone	ZILUNM3LED3W*	Non-Maintained	4.8V, 4.5Ah Ni-Cd	70244	180	51	34	25	24	31	190	130	130
Alternative Systems Available: Specification Sheets Available Upon Request													
Central Battery	ZILULED3W*230S	Slave	-	-	180	51	34	25	24	31	190	N/A	N/A
DALI	ZILUNM3LED*DA	Non-Maintained	6V, 4.5Ah Ni-Cd	70157	260	51	34	25	24	31	190	180	130