


I-Lux

Spotlight Slave

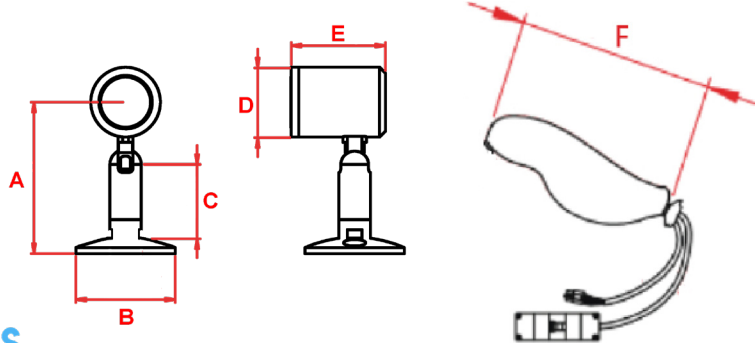

180 Lumens	3 Watts	6000K	Universal Mounting
0.5 Kg	Class I	IP 40	6Y Warranty

Materials

Housing:
Remote Pack:

Die-Cast Aluminium
Silicone Sock

Standard Colour:
Alternative Colours:

Chrome
**White - RAL 9016
Add **/WH** to Order Code

Alternative Colours Available Upon Request

Warranty

Standard Warranty:
Alternative Warranty:

6 Years
10 Years
Add /10 Years to Order Code

Order Code	ZILULED3W**230S
Mode of operation	Slave
Input voltage	230/240V (207Vac - 264Vac) 50/60Hz
Power consumption	3.5VA, $I_{nom} = 15mA$
Lamp	3W
Lamp colour	6000K
Lamp lumen level in emergency	180lm
Nominal lamp current	$I_{rated} = 0.65A$
Nominal lamp power	$P_{rated} = 3W$
Maximum output voltage with no lamp connected	U-OUT = 7.0Vdc
Ingress protection	IP40
Luminaire class	Class I
Weight	0.5Kg
Packaging Weight	0.1kg
Standards	EN61347-2-7, EN61347-2-13, EN 60598-2-22
Environment	0°C to 55°C up to 80% relative humidity

System	Order Code	Mode of Operation	Battery	Battery P/N	Lumens (Emergency)	Dimensions (mm)							
						Spot					Control gear		
						A	B	C	D	E	F	G	H
Central Battery	ZILULED3W**230S	Slave	-	-	180	51	34	25	24	31	210	N/A	N/A
Alternative Systems Available: Specification Sheets Available Upon Request													
Standalone	ZILUNM3LED3W**	Non-Maintained	4.8V, 4.5Ah Ni-Cd	70244	180	51	34	25	24	31	190	130	130
DALI	ZILUNM3LED**DA	Non-Maintained	6V, 4.5Ah Ni-Cd	70157	180	51	34	25	24	31	230	180	130
DALI Central Battery	ZILULED3W**230SDA	Slave	-	-	180	51	34	25	24	31	190	N/A	N/A