


Vanguard

Wall Mounted (WBK) Slave Exit

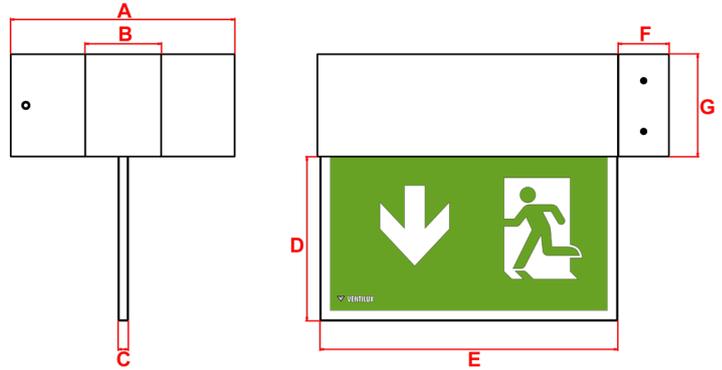

Order Code	ZVGDLED240SWBK
Mode of Operation	Slave
Input voltage	230/240V (207Vac - 264Vac) 50/60Hz
Power consumption	5VA
Lamp	8 x High Powered White Samsung LEDs
Lamp Life	$L_{80} B_{50}$ 80000 Hours
Nominal lamp current	$I_{rated} = 0.35A$
Nominal lamp power	$P_{rated} = 1W$
Cable entry	20mm Rear entry
Luminaire class	Class I
Weight	2.5 kg (no panel) 3 kg (c/w Panel fitted)
Packaging Weight	0.28 kg
Standards	BS5266, EN62034, EN61347-2-7, EN61347-2-13, EN 60598-2-22
Environment	0°C to 55°C up to 80% relative humidity.

Materials

Housing: Stainless Steel
 Panel Legend: Acrylic

Standard Colour: Stainless Steel
 Alternative Colours available upon request

Warranty

Standard Warranty: 6 Years
 Alternative Warranty: 10 Years
 Add /10Y to order code

System	Order Code	Mode of Operation	Battery	Battery P/N	Viewing Distance	Dimensions (mm)						
						A	B	C	D	E	F	G
Central Battery	ZVGDLED240SWBK	Slave	n/a	n/a	32 Metres	220	75	10	162	290	50	101.5
Alternative Systems Available:												
Standalone	VGDM3/LED/WBK	Maintained	4.8V 1.3Ah NiMh	70229	32 Metres	220	75	10	162	290	50	101.5
DALI	ZVGDM3LWBKDALI	Maintained	3.6V 4Ah NiMh	70232	32 Metres	220	75	10	162	290	50	101.5

Legends (Ordered Separately)



Left /Right Arrow (Left one side, Right opposite side)
 PN: LPVGDISO013VL



Down Arrow (both sides)
 PN: LPVGDISO02VL



Up Arrow (both sides)
 PN: LPVGDISO04VL

Additional options of Printed Panels available. Contact Ventilux for further details.