


# Vanguard

## Wall Mounted (WK) Exit

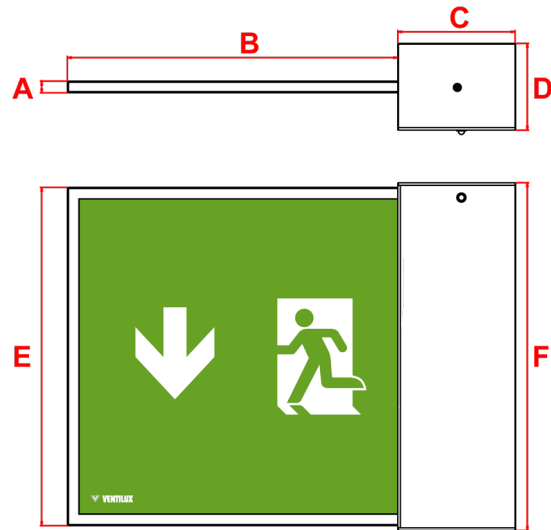

IP 40	6Y Warranty	Stainless Steel	Wall Mounted
32m Viewing Distance	2.75 Kg	NiMh Battery	Class I

### Materials

Housing: Stainless Steel  
Panel Legend: Acrylic

Standard Colour: Stainless Steel

Alternative Colour: on request


### Warranty

Standard Warranty: 6 Years  
Alternative Warranty: 10 Years  
Add **/10Y** to order code

Order Code	VGDM3/LED/WK
Emergency duration	3 hours
Input voltage	230/240V (207Vac - 264Vac) 50/60Hz
Power consumption	5VA
Battery charger	Constant Current Nominal charge 0.05A
Battery low voltage cut off	4.0Vdc
Battery discharge current @ 4.8Vdc	0.28A
Battery discharging limits	up to 0.4A for 3 hours
Lamp	8 x High Powered White Samsung LEDs
Lamp Life	$L_{80} B_{50}$ 80000 Hours
Nominal lamp current	$I_{rated} = 0.35A$
Nominal lamp power	$P_{rated} = 1W$
Cable entry	20mm Rear entry
Luminaire class	Class I
Weight	1.725 kg (no panel) 2.75 kg (c/w Panel fitted)
Packaging Weight	0.2 kg
Standards	BS5266, EN62034, EN61347-2-7, EN61347-2-13, EN 60598-2-22
Environment	0°C to 45°C up to 80% relative humidity.

System	Order Code	Mode of Operation	Battery	Battery P/N	Viewing Distance	Dimensions (mm)					
						A	B	C	D	E	F
Standalone	VGDM3/LED/WK	Maintained	4.8V 1.3Ah NiMh	70229	32 Metres	10	284	100	75	290	298
Alternative Systems Available:											
Central Battery	ZVGLED240SWK	Slave	n/a	n/a	32 Metres	10	284	100	75	290	298
DALI	ZVGDM3LWKDALI	Maintained	3.6V 4.5Ah NiMh	70272	32 Metres	10	284	100	75	290	298


### Legends (Ordered Separately)

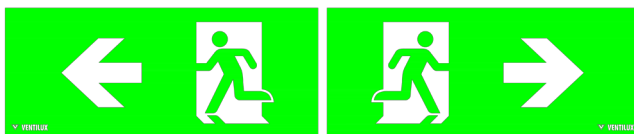

Left /Right Arrow (Left one side, Right opposite side)  
PN: LPVGDIS13WKVL



Down Arrow (both sides)  
PN: LPVGDWKIS2WKVL



Up Arrow (both sides)  
PN: LPVGDWKIS2WKVL

**Additional options of Printed Panels available. Contact Ventilux for further details.**