
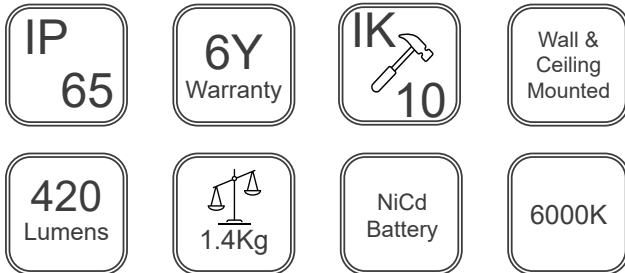
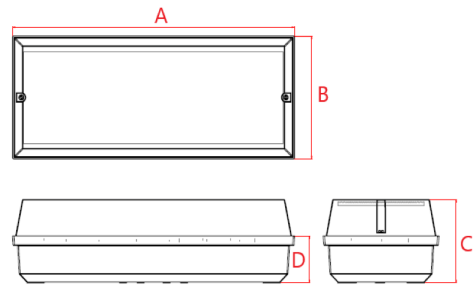


Weather Proof

3W Emergency Bulkhead

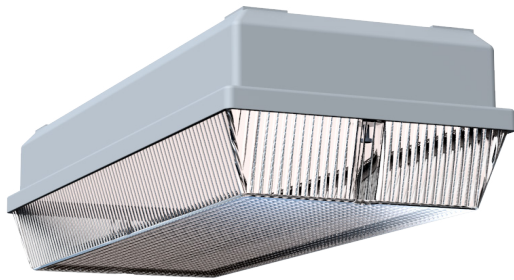

Materials

Housing: Polycarbonate (Base)
Clear Polycarbonate (Diffuser)
Geartray: Powder coated sheet steel

Standard Colour: White RAL 9016
Alternative Colours: Available on request

Warranty

Standard Warranty: 6 Years
Alternative Warranty: 10 Years
Add /10Y to Order Code


Order Code	WPNM3/LED3W/P
Mode of operation	Non-Maintained
Emergency duration	3 Hours
Input voltage	230-240V AC
Power consumption	3.5VA
Battery type	4.8V 4.5Ah NiCd
Battery low voltage cut off	4V
Battery discharge current @ 4.8V DC	0.78A
Lamp	3 X 1 Watt CREE XP-G3 LED
Lamp colour	6000K Cool White
Lamp lumen level in emergency	420
Nominal lamp voltage	9V
Nominal lamp current	0.35A CC
Nominal lamp power	3 Watts
Maximum output voltage with no lamp connected	U-OUT=13.5V DC
Ingress Protection	IP65
Impact Resistance	IK10
Cable entry	To be Drilled and Glanded on installation (Glands not included)
Luminaire class	Class I
Product Weight	1.4 Kg
Packaging Weight	0.17 Kg
Standards	EN61347-2-7, EN 60598-2-22, EN 55015
Environment	0°C to 45°C up to 80% relative humidity

System	Order Code	Mode of Operation	Battery	Battery P/N	Lumens (Emergency)	Dimensions (mm)			
						A	B	C	D
Standalone	WPNM3/LED3W/P	Non-Maintained	4.8V 4.5Ah NiCd	70123	420	370	150	102	58
Alternative Systems Available:									
Standalone	WPM3/LED3W/P	Maintained	4.8V 4.5Ah NiCd	70123	420	370	150	102	58
DALI	WPNM3/LED/3WDA	Non-Maintained	6V 4.5Ah NiCd	70153	420	370	150	102	58
Central Battery	ZWPLED3W230S	Slave	n/a	n/a	420	370	150	102	58
Dali Wireless	ZWPNM3LED5WPAW	Non-Maintained	6.4V 6.4Ah LiFePO4	70258	800	370	150	102	58

Available Accessories					
Order Code	Description	Material	Cutout (mm)	Dimensions(mm)	
WP/SRK	Semi-Recessing Kit	Powder Coated Steel	360 x 143	398	179

Photometrics

Mounting Height	Lighting level directly under Luminaire										
		0.5	1.0	0.5	1.0	0.5	1.0	0.5	1.0	0.5	1.0
2m	37.49	6.3	5.2	15.0	12.5	14.0	11.6	13.0	10.7	5.4	4.4
2.5m	24.03	6.9	5.7	16.7	13.8	15.5	12.9	14.3	11.9	5.9	4.9
3m	16.70	7.5	6.1	18.2	14.9	16.9	13.9	15.5	12.9	6.4	5.1
4m	9.40	8.4	6.6	20.6	16.8	19.2	15.6	17.7	14.4	7.2	5.2
6m	4.18	9.2	5.9	24.3	18.4	22.4	16.8	20.5	15.2	7.6	5.8
8m	2.35	8.2	5.5	26.4	16.4	23.7	16.4	20.9	16.4	8.2	5.6
10m	1.51	8.2	4.9	22.1	16.3	22.4	16.3	22.6	16.2	8.1	4.4

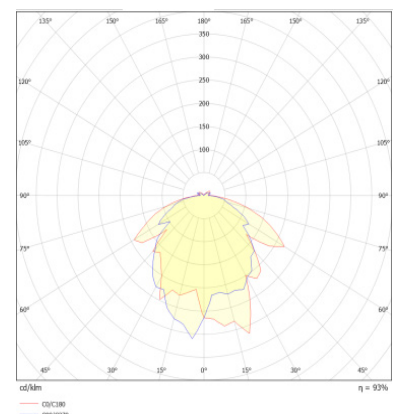

www.ventilux.com ● sales@ventilux.ie ● sales@ventilux.co.uk (UK Enquiries Only) ● SS2-011-1

We adopt a policy of continuous product and services improvement and we reserve the right to vary details without prior notice
For Warranty Terms please visit the Ventilux website