
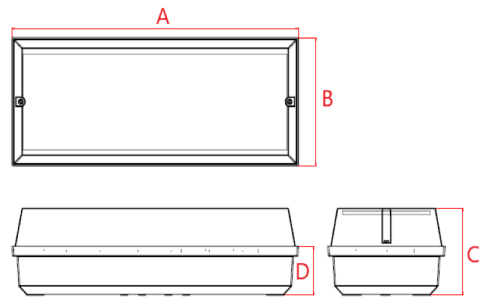


Weather Proof

IP65 3W DALI Emergency Bulkhead

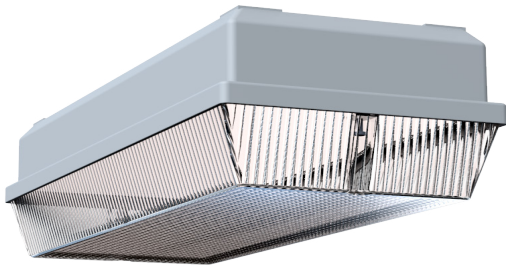

Materials

Housing: Polycarbonate (Base)
Clear Polycarbonate (Diffuser)
Geartray: Powder coated sheet steel

Standard Colour: White RAL 9016
Alternative Colours: Available on request

Warranty

Standard Warranty: 6 Years
Alternative Warranty: 10 Years
Add /10Y to Order Code


Order Code	WPNM3/LED3W/DA
Mode of operation	Non-Maintained DALI
Emergency duration	3 Hours
Input voltage	230-240V AC
Power consumption	8VA
Battery type	6V 4.5Ah NiCd
Battery low voltage cut off	5V
Battery discharge current @ 6V DC	0.85A
Lamp	3 X 1 Watt CREE XP-G3 LED
Lamp colour	6500K
Lamp lumen level in emergency	300
Nominal lamp voltage	3V
Nominal lamp current	1A
Nominal lamp power	3 Watts
Maximum output voltage with no lamp connected	U-OUT=10V DC
Ingress Protection	IP65
Impact Resistance	IK10
Cable entry	To be Drilled and Glanded on installation (Glands not included)
Luminaire class	Class I
Product Weight	1.6 Kg
Packaging Weight	0.17 Kg
Standards	EN61347-2-7, EN 60598-2-22, EN 55015
Environment	0°C to 45°C up to 80% relative humidity

System	Order Code	Mode of Operation	Battery	Battery P/N	Lumens (Emergency)	Dimensions (mm)			
						A	B	C	D
DALI	WPNM3/LED3W/DA	Non-Maintained	6V 4.5Ah NiCd	70153	300	370	150	102	58
Alternative Systems Available:									
Self-Contained	WPM3/LED3W/P	Maintained	4.8V 4.5Ah NiCd	70123	420	370	150	102	58
Self-Contained	WPNM3/LED/3W/P	Non-Maintained	4.8V 4.5Ah NiCd	70123	420	370	150	102	58
Central Battery	ZWPLED230S	Slave	n/a	n/a	420	370	150	102	58
Dali Wireless	ZWPNM3LED5WPDW	Non-Maintained	6.4V 6.4Ah LiFePO4	70258	800	370	150	102	58

Available Accessories					
Order Code	Description	Material	Cutout (mm)	Dimensions(mm)	
WP/SRK	Semi-Recessing Kit	Powder Coated Steel	360 x 143	398	179

Photometrics

Mounting Height	Lighting level directly under Luminaire	↔		↔		↔		↔		↔	
		0.5	1.0	0.5	1.0	0.5	1.0	0.5	1.0	0.5	1.0
2m	37.49	6.3	5.2	15.0	12.5	14.0	11.6	13.0	10.7	5.4	4.4
2.5m	24.03	6.9	5.7	16.7	13.8	15.5	12.9	14.3	11.9	5.9	4.9
3m	16.70	7.5	6.1	18.2	14.9	16.9	13.9	15.5	12.9	6.4	5.1
4m	9.40	8.4	6.6	20.6	16.8	19.2	15.6	17.7	14.4	7.2	5.2
6m	4.18	9.2	5.9	24.3	18.4	22.4	16.8	20.5	15.2	7.6	5.8
8m	2.35	8.2	5.5	26.4	16.4	23.7	16.4	20.9	16.4	8.2	5.6
10m	1.51	8.2	4.9	22.1	16.3	22.4	16.3	22.6	16.2	8.1	4.4

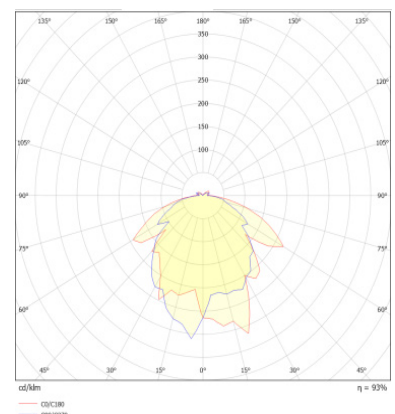

www.ventilux.com ● sales@ventilux.ie ● sales@ventilux.co.uk (UK Enquiries Only) ● SS2-012-1

We adopt a policy of continuous product and services improvement and we reserve the right to vary details without prior notice
For Warranty Terms please visit the Ventilux website