
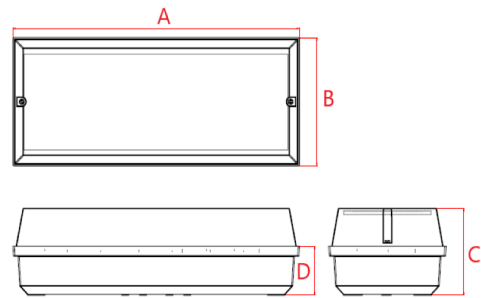


Weather Proof

IP65 3W Self Test Emergency Bulkhead

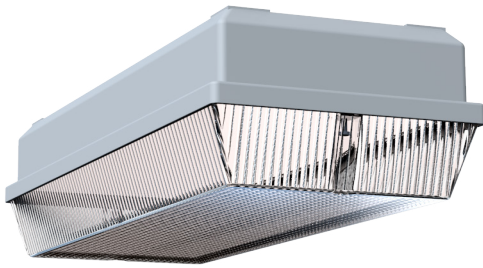

Materials

Housing: Polycarbonate (Base)
Clear Polycarbonate (Diffuser)
Geartray: Powder coated sheet steel

Standard Colour: White RAL 9016
Alternative Colours: Available on request

Warranty

Standard Warranty: 6 Years
Alternative Warranty: 10 Years
Add /10Y to Order Code


Order Code	WPNM3/LED3W/ST
Mode of operation	Non-Maintained Self Test
Emergency duration	3 Hours
Input voltage	230-240V AC
Power consumption	8VA
Battery type	6V 4.5Ah NiCd
Battery low voltage cut off	5V
Battery discharge current @ 6V DC	0.85A
Lamp	3 X 1 Watt CREE XP-G3 LED
Lamp colour	6500K
Lamp lumen level in emergency	300
Nominal lamp voltage	3V
Nominal lamp current	1A
Nominal lamp power	3 Watts
Maximum output voltage with no lamp connected	U-OUT=10V DC
Ingress Protection	IP65
Impact Resistance	IK10
Cable entry	To be Drilled and Glanded on installation (Glands not included)
Luminaire class	Class I
Product Weight	1.6 Kg
Packaging Weight	0.17 Kg
Standards	EN61347-2-7, EN 60598-2-22, EN 55015
Environment	0°C to 45°C up to 80% relative humidity

System	Order Code	Mode of Operation	Battery	Battery P/N	Lumens (Emergency)	Dimensions (mm)			
						A	B	C	D
Self-Test	WPNM3/LED3W/ST	Non-Maintained	6V 4.5Ah NiCd	70153	300	370	150	102	58
Alternative Systems Available:									
Self-Contained	WPNM3/LED3W/P	Non-Maintained	4.8V 4.5Ah NiCd	70123	420	370	150	102	58
Central Battery	ZWPLED230S	Slave	n/a	n/a	420	370	150	102	58
DALI	WPNM3/LED3W/DA	Non-Maintained	6V 4.5Ah NiCd	70153	300	370	150	102	58
Dali Wireless	ZWPNM3LED5WPDW	Non-Maintained	6.4V 6.4Ah LiFePO4	70258	800	370	150	102	58

Available Accessories					
Order Code	Description	Material	Cutout (mm)	Dimensions(mm)	
WP/SRK	Semi-Recessing Kit	Powder Coated Steel	360 x 143	398	179

Photometrics

Mounting Height	Lighting level directly under Luminaire										
		0.5	1.0	0.5	1.0	0.5	1.0	0.5	1.0	0.5	1.0
2m	37.49	6.3	5.2	15.0	12.5	14.0	11.6	13.0	10.7	5.4	4.4
2.5m	24.03	6.9	5.7	16.7	13.8	15.5	12.9	14.3	11.9	5.9	4.9
3m	16.70	7.5	6.1	18.2	14.9	16.9	13.9	15.5	12.9	6.4	5.1
4m	9.40	8.4	6.6	20.6	16.8	19.2	15.6	17.7	14.4	7.2	5.2
6m	4.18	9.2	5.9	24.3	18.4	22.4	16.8	20.5	15.2	7.6	5.8
8m	2.35	8.2	5.5	26.4	16.4	23.7	16.4	20.9	16.4	8.2	5.6
10m	1.51	8.2	4.9	22.1	16.3	22.4	16.3	22.6	16.2	8.1	4.4

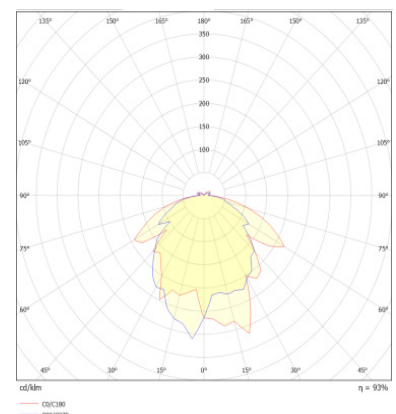

www.ventilux.com ● sales@ventilux.ie ● sales@ventilux.co.uk (UK Enquiries Only) ● SS2-196-1

We adopt a policy of continuous product and services improvement and we reserve the right to vary details without prior notice
For Warranty Terms please visit the Ventilux website