


WTL 2X5W

IP67 DALI Emergency Twinspot

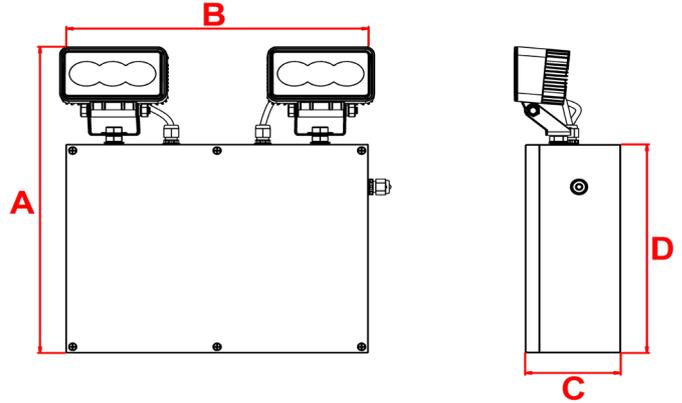

IP 67	6Y Warranty	Class I	Wall Mounting
2x350 Lumens	3.6Kg	LiFePO4 Battery	6000K

Materials

Housing: Polycarbonate
Lamp Heads: Die-Cast Aluminum with Polycarbonate Lenses

Standard Colour: Grey RAL 7032

Warranty

Standard Warranty: 6 Years
Alternative Warranty: 10 Years
Add /10Y to Order Code

Order Code	WTL2X5WLED/NM3/DA
Mode of operation	Non-maintained Dali
Emergency duration	3 hours
Input voltage	230/240V (207Vac - 264Vac) 50/60Hz
Power consumption	2.4VA (Full Battery)
Battery	Rechargeable LiFePO4 9.6V 6.4Ah
Battery discharge current @ 9.6V DC	1.15A
Battery discharging limits	up to 1.6A for 3Hrs
Lamp	2 x LED lamp heads total wattage 10 watts Each LED lamp contains 3 high power LEDs Swivel & Tilt Lamp Heads
Lamp lumen level emergency	350 lumens for each lamp head
Lamp Life	L ₈₀ B ₅₀ 80000 Hours
Cable entry	To be Drilled and Glanded on installation (Glands not included)
Weight	3.6kg
Packaging Weight	0.235kg
Standards	BS5266, EN62034, EN61347-2-7, EN61347-2-13, EN 60598-2-22
Environment	0°C to 45°C up to 80% relative humidity.

System	Order Code	Mode of Operation	Battery	Battery P/N	Lumens (Emergency)	Dimensions (mm)			
						A	B	C	D
DALI	WTL2X5WLED/NM3/DA	Non-Maintained	9.6V 6.4Ah LiFePO4	70255	2 x 350	348	316	100	237
Alternative Systems Available:									
Self-Test	WTL2X5WLED/NM3/ST	Non-Maintained	9.6V 6.4Ah LiFePO4	70255	2 x 350	348	316	100	237
Standalone	WTL2X9WLED/NM3	Non-Maintained	12V 7Ah SLA	70162	2 x 475	348	316	100	237
DALI Central Battery	ZWTL2X9WL230SDA	Slave	n/a	n/a	2 x 475	348	316	100	237
Central Battery	ZWTL2X9WL230S	Slave	n/a	n/a	2 x 475	348	316	100	237