


ZKPM4DALI250V

250V DALI Conversion Kit

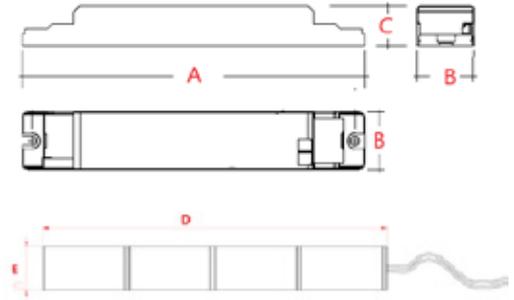

Materials

Charger Housing: Polycarbonate
 Battery Fixing Clips: PVC

Warranty

Standard Warranty: 3 Years

Order Code	ZKPM4DALI250V
DALI Interface	For Controlled Monitoring and Reporting
Mode of operation	Maintained -When used with existing Independent Mains LED driver.
Emergency duration	3 hours
Power Consumption	16VA
Input voltage	220/240V (207VAC - 264VAC) 50/60Hz
Battery type	Rechargeable NiCad Battery 4.8V 4.5Ah
Battery low voltage cut off	4V DC
Battery discharge current @ 4.8V DC	0.8A
Nominal charge current range	300mA
Typical Output Power	3.5W
Output Voltage Range	$U_{rated} = 48-250V$ DC
Output Current Range	$I_{rated} = 12-75mA$
Maximum open circuit	U-OUT=300V
Indicator LED	Bi-Colour (Red/Green)
Product Weight	0.8Kg
Ingress Protection	IP20
Standards	EN61347-2-7, EN61347-2-13, EN 60598-2-22, EN 55015
Environment	0°C to 45°C up to 80% relative humidity

System	Order Code	Battery	Battery P/N	Dimensions (mm)				
				A	B	C	D	E
DALI	ZKPM4DALI250V	4.8V, 4.5Ah NiCad	70123	179	30	21	236	32.5